



Always a
cut ahead!



Glow-wire floor-mounted cutting device SPEWE Isoturbo® 6005L-30



SPEWE. 


SPEWE Isoturbo® 6005L-30

Convincing details

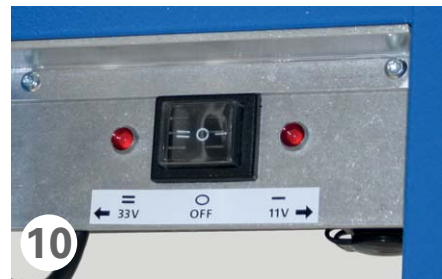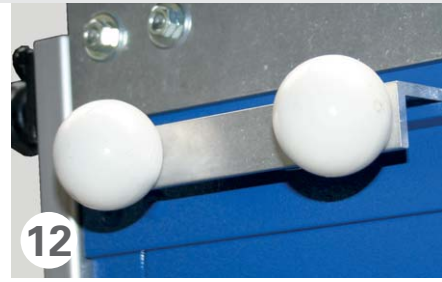


Types of cuts


straight

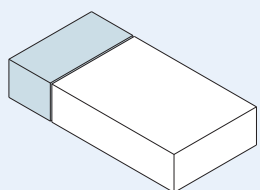


mitre

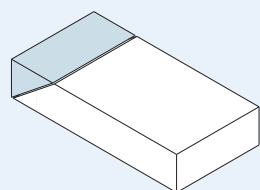


groove

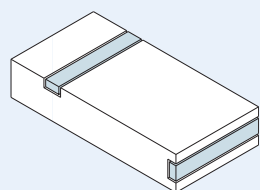

stepped groove

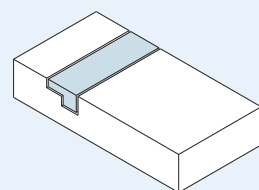

stepped

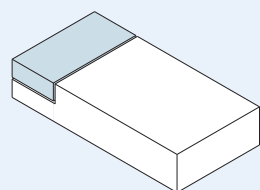

Glow-wire floor-mounted cutting device

Installation positions

13




14




- 1 Turbo switch for even faster cuts (cutting length with turbo 1020 mm)
- 2 Swivel-mounted position guide with large panel stops
- 3 Button for turbo cuts (also increases cutting speed)
- 4 Integrated spare wire spool with locking mechanism
- 5 Mitre gauge for repetitive cuts
- 6 Robust aluminium hinged foot and integrated free-standing support with bracing
- 7 Integrated stop for repeat diagonal cuts
- 8 Integrated high-performance transformer with safety switch (fuse not required)
- 9 Grid rail for corner cutter to accommodate adjustable tabs for multiple cut-outs on an insulation panel
- 10 Integrated 2-step switch to select operation of stand-alone unit or corner cutter (with LED)
- 11 Integrated socket to operate corner cutter
- 12 Two-ball support when leaning on scaffolding rails
- 13 Lean on wall or scaffolding
- 14 Upright model with free-standing support


stepped mitre

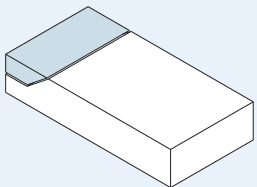


bevelled

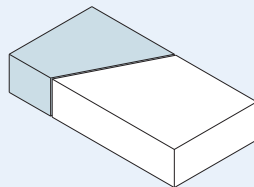

bevelled mitre

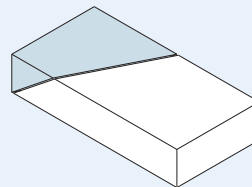

straight cut

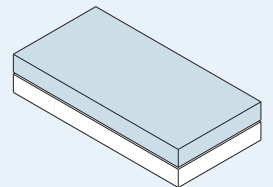



Accessories for SPEWE Isoturbo® 6005L-30

Included with the equipment

Open-end wrench and torx wrench



Optionally available

Additional corner cutter SPEWE ES-6005-30 for precise rafter cut-outs and window sill cut-outs. Cutting depth 300 mm. Mount directly on to stand-alone unit without additional transformer, plug in and ready to use. Can be swivelled from 0° to 45°. Integrated spare wire spool



Extension kit 43 cm Type III, one pair of swivel axes for cutting depths of up to 430 mm



Strong and compact ABS case made from impact-resistant plastic



The product

The compact and robust glow-wire floor-mounted cutting device SPEWE Isoturbo® 6005L-30 is a user-friendly and efficient tool. The integrated stops are ideal for fast and time-saving repeat cuts for mitres, cut-outs and bevels. The robust, precise and low maintenance ball-bearing guides guarantee easy operation.

Technical Data

- Cutting depth: 300 mm
- Cutting length: 1270 mm
- Cutting length with turbo: 1020 mm
- Weight: 19.3 kg

Delivery information

The SPEWE Isoturbo® 6005L-30 cutting device with integrated transformer, hinged foot and free-standing support, spare wire 0.65 mm / 9 m, open-end wrench and torx wrench. Delivered in a box.

Spewe AG

Hauptstrasse 332
Gewerbegebiet Mösli
CH-5326 Schwaderloch

Phone: +41 (0)56 203 03 30
Fax: +41 (0)56 203 03 31
Website: www.spewe.ch

